

This information sheet contains important suggestions with respect to the materials and their treatment. Read it carefully and preserve it with care.

Characteristics



Use and function:

High-quality profile for technical and visual skirting between floor covering and wall.

Components	Material	Weight proportion in %
Supporting material	• Spruce fingerjoint	90-92%
Wrapping material	• Real wood veneer • Acrylic melamine resin film • Impregnated decor foil • Polyblend foil	6-8% 6-8% 6-8% 6-8%
Bonding	• EVA Melt adhesive • PUR Melt adhesive	1,5-2,5% 1,5-2,5%
Surface	• UV-varnish transparent / colored • Water-based varnish transparent / colored • Oiled • Oiled raw wood look treated with beeswax oil	1-1,5% 1-1,5% 1-1,5% 1-1,5%



Tolerances:

PEDROSS N13001



Moisture content at delivery:

< 10 %



Formaldehyd emission:

according to ISO 16000, meets requirement of RAL-ZU 38 (EPH Nr.251472/1/B)



Resistance to fungal and insect attack:

DIN EN 350-2; Class 4

Storage conditions



Store the profiles upright or on a flat surface



Protect from exposure to chemical substances



Protect from moisture



Ideal storage temperature 18°C



Protection from sunlight



Storage at humidity of 55 - 70%

Consequential damage due to improper storage

- Colour changes on the surface
- Damage to the lacquer coating
- Crack formation
- Curvature, twisting
- Dimensional differences due to shrinkage and swelling
- Delamination of the decor material

SPRUCE SUPPORT SKIRTING BOARDS

This information sheet contains important suggestions with respect to the materials and their treatment. Read it carefully and preserve it with care.

Background and walls



dry



free from dust



straight




resistant




- Proof the stability and possible cavities of the wall
- Adjust and compensate irregularities

Utilization


- choice of the preferred installation way depending on the features of the wall (dry, plasterboards, concrete, wood and/or others):

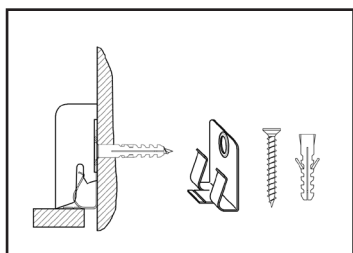

Clipstar

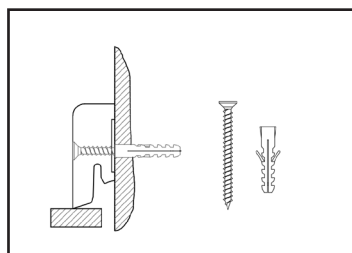

Screws and dowels



Spikes and/or glue

Following steps:

1. Measuring the wall length
2. Cut the skirting boards at length, avoid joints as much as possible and consider in advance if the installation will take place by using plastic corner pieces or by mitering a 45-degree corner at the edges.
3. Depending on the features of the wall, a distance of 25 to 50 cm between clips, screws or spikes is recommended



Only adhesive tapes with strength (DIN EN 1939 regulation) of max. 2N/cm shall be used.



Respect safety regulations and use the correct equipment during the installation.

Care and disposal



Use soft towels or cloths and non-aggressive detergents for regular cleaning



Avoid any rubbing or detergents that require rubbing



Remove the dust by using a vacuum cleaner



Avoid the accumulation of water or liquid products



Dispose an environmentally friendly way after dismantling or at the end of the utilization



Possibility of renewing of the surface by treatment with special products (available at Pedross)¹

Additional information

Information and data contained in this technical sheet are meant to ensure the correct utilization and suitability of the product and are based on our knowledge and experience. Utilizers are not exempted from their responsibility of testing the suitability of the product prior to its installation. Any kind of utilization which is not included in the present sheet will require prior advice and will happen at own risk in case of lack of approval. This concerns especially any possible combined utilization with other products.

Our quality conditions and technical data sheets are updated and improved a continuous way. Therefore this sheet might no longer be valid at the time of future orders. We would like to point out that it is your duty to download the updated document from the customer portal (login via the website www.pedross.com) before each order.

¹) Applies only to Oiled raw wood look treated with beeswax oil